

Mounting Instructions


Series 782 Cable Reel

Main circuit connection must be done by a qualified installation contractor.

Choose a connecting cable with at least the same design and quality as for the distribution cable. Unscrew the cover and connect the cable conductors to the terminal block.

The following applies if an outlet socket is to be fitted:

- A minimum protection class of IPX4 to be used.
- The earth (yellow/green cable) should be connected to the applicable terminal in the outlet socket.
- Strain relief and flexible cable sheaths should be secured.

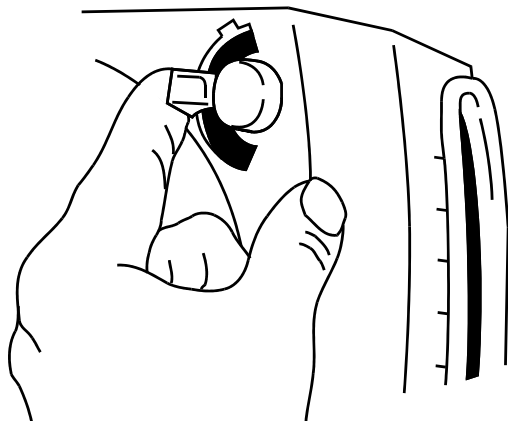

Ratchet Mechanism

The ratchet mechanism locks the cable in the desired outdrawn position. The ratchet device is released when the cable is pulled out slightly further and the cable is then automatically recoiled. The ratchet function can easily be disengaged by pushing the hook on the reel (see fig.) and turn it clockwise. By turning the hook counter clockwise, the ratchet can be removed completely.

Warning!

Before dismantling any part of the reel, for example when changing the cable:

- Disconnect power supply
- Release spring tension by removing the cable stop and allow the cable to recoil completely