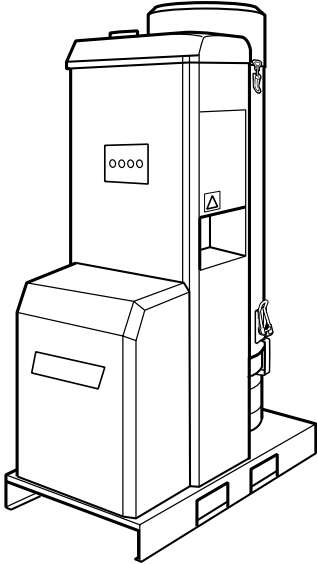


E-PAK 300  
 3 X 208 V 60Hz  
 3 X 230 V 60Hz  
 3 X 460 V 60Hz  
 3 X 575 V 60Hz

# Technical Description

## E-PAK 300 Vacuum System

	Description	Part Number
	<p><b>E-PAK 300</b></p> <p><b>Application:</b> On-torch extraction for welding fumes, small grinding, sanding and cutting tools. Stationary or semi-portable installation.</p> <p><b>Power:</b> 10 hp</p> <p><b>Capacities:</b> Free blowing: 318 cfm  <b>Max vacuum: 112 in.W.G.</b>  <b>Design: 209 cfm at 60 in W.G.</b></p> <p><b>Description:</b> Vacuum unit with direct driven side channel fan. Fan unit and filter fitted as one unit on a steel profile frame together with Y/D starter, control unit and integrated 24 V transformer. Automatic start/stop, automatic filter cleaning. 50 liter/ 13 gallon bin with wheels.</p> <p><b>Noise Level:</b> 65 dB (A) at specified capacity  <b>(ISO 11201)</b></p> <p><b>Filter:</b> Two stage separation. Central inlet with velocity reduction feature and bag type fine filters. Automatic filter cleaning by reversed air pulse.      Filter area: 3.4m<sup>2</sup> / 32.3 sq. ft.</p> <p><b>Dimension:</b> L X W X H: 1200 X 690 X 2000mm/      47 X 27 X 79 in.</p> <p><b>Weight:</b> 235 kg / 518 lb</p>	
	<p><b>E-PAK 300</b>          Voltage: 3 X 208 V 60Hz          Switch disconnecter MS3-KG64</p>	<p><b>40 0513 80</b>  <b>40 1222 90</b></p>
	<p><b>E-PAK 300</b>          Voltage: 3 X 230 V 60Hz          Switch disconnecter MS3-KG64</p>	<p><b>40 0513 90</b>  <b>40 1222 90</b></p>
	<p><b>E-PAK 300</b>          Voltage: 3 X 460 V 60Hz          Switch disconnecter MS3-KG32</p>	<p><b>40 0514 00</b>  <b>40 1222 80</b></p>
	<p><b>E-PAK 300</b>          Voltage: 3 X 575 V 60Hz          Switch disconnecter MS3-KG32</p>	<p><b>40 0514 10</b>  <b>40 1222 80</b></p>