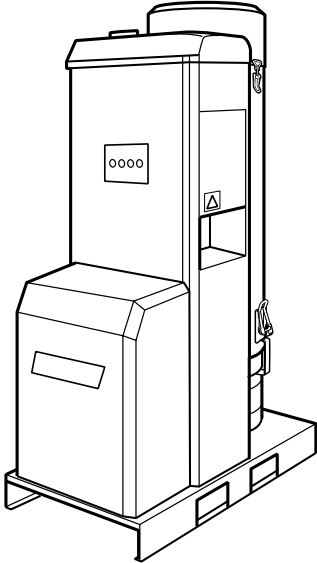


E-PAK 500
 3 X 208 V 60Hz
 3 X 230 V 60Hz
 3 X 460 V 60Hz
 3 X 575 V 60Hz

Technical Description

E-Pak 500 Vacuum System

	Description	Part Number
	<p>E-PAK 500</p> <p>Application: On-torch extraction for welding fumes, small grinding, sanding and cutting tools. Stationary or semi-portable installation.</p> <p>Power: 20 hp</p> <p>Capacities: Free blowing: 589cfm Max vacuum: 104in.W.G.x Design: 359 cfm at 60 in W.G.</p> <p>Description: Vacuum unit with direct driven side channel fan fitted as one unit on a steel profile frame together with Y/D starter, control unit and integrated 24 V transformer. Automatic start/stop, automatic filter cleaning. 50 liter/ 13 gallon bin with wheels.</p> <p>Noise Level: 69 dB (A) (ISO 11201)</p> <p>Filter: Two stage separation. Central inlet with velocity reduction feature and bag type fine filters. Automatic filter cleaning by reversed air pulse. Filter area: 3.4m² / 32 sq. ft.</p> <p>Dimension: L X W X H: 1200 X 690 X 2000mm/ 47 X 27 X 79 in.</p> <p>Weight: 333 kg / 734 lb</p>	
	<p>E-PAK 500 Voltage: 3 X 208 V 60Hz Switch disconnector MS3-KG100</p>	<p>40 0514 40 40 1222 60</p>
	<p>E-PAK 500 Voltage: 3 X 230 V 60Hz Switch disconnector MS3-KG100</p>	<p>40 0514 50 40 1222 60</p>
	<p>E-PAK 500 Voltage: 3 X 460 V 60Hz Switch disconnector MS3-KG64</p>	<p>40 0514 60 40 1222 90</p>
	<p>E-PAK 500 Voltage: 3 X 575 V 60Hz Switch disconnector MS3-KG64</p>	<p>40 0514 70 40 1222 90</p>