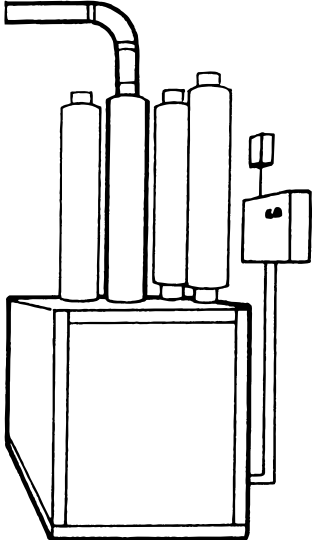


Roots blower systems 45 kPa 180 in. W.G., 2600 m³/h1236 cfm
 3 x 208 V 60 Hz 3 x 230 V 60 Hz
 3 x 400 V 60 Hz 3 x 460 V 60 Hz
 3 x 575 V 60 Hz

Technical Description

RBU 2600 Vacuum System

	Description	Part Number
	<p>RBU 2600 Vacuum system with filter</p> <p>Application: Heavy cleaning, swarf removal, ontool extraction from grinding and sanding. On torch welding extraction especially suitable with high pressure drops from long pipe systems etc.</p> <p>Capacity: Free blowing: 1883 cfm. Max vacuum: 180 in. W.G. Design: 1530 cfm at 80 in. W.G.</p> <p>Description: Vacuum unit with V-belt driven Roots pump. Equipped with acoustic enclosure suitable for outdoor installations and as standard supplied with vacuum and discharge silencers, universal valve including safety valve and back flush valve.</p> <p>Noise level: (ISO 11201) 70 dB(A).</p> <p>Dimensions: L x W x H: 1510 x 1070 x 1260 mm / 59 x 42 x 50 in.</p> <p>Connection: Inlet/outlet: Ø 200 mm/8.0 in.</p>	
	<p>RBU 2100 Vacuum system with filter</p> <p>Motor power: 75 hp</p> <p>Weight: 1220Kg 2690lb</p> <p>Vacuum unit: 208 V 60 Hz</p> <p>Starter: HVS 147–180A</p> <p>Filter: FlexFilter Twin</p> <p>Filter control: AFC-B</p> <p>Maintenance switch: MS6-C316</p>	<p>40 1055 30</p> <p>40 1236 10</p> <p>40 1186 05</p> <p>40 7805 00</p> <p>40 1224 00</p>
	<p>RBU 2100 Vacuum system with filter</p> <p>Motor power: 75 hp</p> <p>Weight: 1220Kg 2690lb</p> <p>Vacuum unit: 230 V 60 Hz</p> <p>Starter: HVS 147–180A</p> <p>Filter: FlexFilter Twin</p> <p>Filter control: AFC-B</p> <p>Maintenance switch: MS6-C316</p>	<p>40 1055 30</p> <p>40 1236 10</p> <p>40 1186 05</p> <p>40 7805 00</p> <p>40 1224 00</p>


*NB. Maintenance switch, heat cap and inlet bend, alternatively silencer bend, must be ordered separately.

*NB. If you intend to install microswitches you also need SSR relay, Part Number 40121130.

Roots blower systems 45 kPa 180 in. W.G., 2600 m³/h 1530 cfm
 3 x 208 V 60 Hz 3 x 230 V 60 Hz
 3 x 400 V 60 Hz 3 x 460 V 60 Hz
 3 x 575 V 60 Hz

Technical Description

RBU 2600 Vacuum System

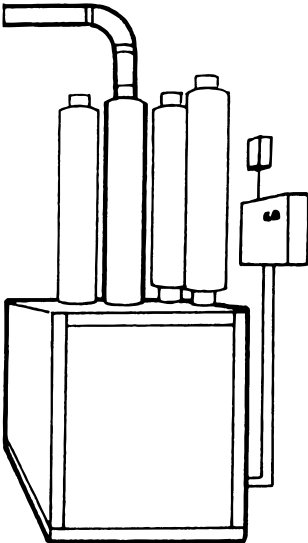	Description	Part Number
	RBU 2600 Vacuum system with filter Motor power: 75 hp Weight: 1220Kg 2690lb Vacuum unit: 400 V 60 Hz Starter: HVS 42-92A Filter: FlexFilter Twin Filter control: AFC-B Maintenance switch: MS6-KG160	40 1055 40 40 1236 40 40 1186 05 40 7805 00 40 1224 20
	RBU 2100 Vacuum system with filter Motor power: 75 hp Weight: 1150Kg 2325lb Vacuum unit: 460 V 60 Hz Starter: HVS 42-92A Filter: FlexFilter Twin Filter control: AFC-B Maintenance switch: MS6-KG125	40 1055 50 40 1236 40 40 1186 05 40 7805 00 40 1224 10
	RBU 2600 E Vacuum system with filter Motor power: 75 hp Weight: 1150Kg 2325lb Vacuum unit: 575 V 60 Hz Starter: HVS 42-92A Filter: FlexFilter Twin Filter control: AFC-B Maintenance switch: MS6-KG160	40 1055 60 40 1236 40 40 1186 05 40 7805 00 40 1224 20

*NB. Maintenance switch, heat cap and inlet bend, alternatively silencer bend, must be ordered separately.

*NB. If you intend to install microswitches you also need SSR relay, Part Number 40121130.